



2026 BYD SEAL 6 PREMIUM PHEV

BYD SEAL 6 PREMIUM PHEV

PERFORMANCE

- Front Wheel Drive
- 1.5L Turbocharged Petrol Engine
- Macpherson Front Suspension
- Multi-Link Rear Suspension
- 17-inch Rims
- 255 Horsepower
- 330 Nm Torque
- 180 km/h Top Speed
- 65 km EV Range. 1,100 km Hybrid Range (WLTC)
- 11.75 kWh Battery Capacity
- 65L Fuel Tank Capacity
- 5.9 L/100km Fuel Consumption

DIMENSIONS

Length 4830 mm Width 1875 mm Height 1495 mm
Wheelbase 2790 mm Curb Weight 1620 kg

FEATURES

- Adaptive Intelligent Cruise Control (ACC, ICC)
- Bluetooth Phone Set
- Dual Zone Voice Control System
- 50W Wireless Phone Charging Pad
- Keyless Entry, Push Start, Remote Start
- Automatic Vehicle Hold (Auto Hold)
- Sport, Normal, Eco Drive Modes
- Snow Terrain Mode
- Intelligent Power Brake System
- 360 Camera with 6 Parking Radars
- Apple CarPlay, Android Auto, FM/AM DAB Radio
- Panoramic Roof with Power Sunroof
- Multi-Color Interior Ambient Lights
- 8 Speaker Sound System
- 12.8-inch Touchscreen Display
- 6-Way Power Front Seats with Ventilation

















BYD Auto Industry Company
Limited CHINA
Model name: SEAL 6 HVC
Manufacture date: 2024/01
This vehicle complies with standards
mandated in USHC electric vehicles
and is not intended for use in other
countries or jurisdictions.
VIN: L00C28C4ET0000000
Country: Passenger Car

Roadside
Assistance
800-448-6868









TYE-运动版
HWID-3820010
HV-2.3.2
SV-1.01.03
02 30 70251202



11:48AM



OK



km/h

请您在使用产品前将产品保护膜撕掉
Please remove the protective film before using!

34.8 psi
45 °C



34.8 psi
46 °C

35.5 psi
46 °C



36.5 psi
47 °C

14 %
240 km

240 km



Radio

RDS Kadak FM

-8 kW

ODO 22 km



R
N P



请您在使用产品前将产品保护膜撕掉!
Please remove the protective film before using!

11:48 AM Radio



RDS Kadak FM

Not connected

GPack



Lo

Lo




























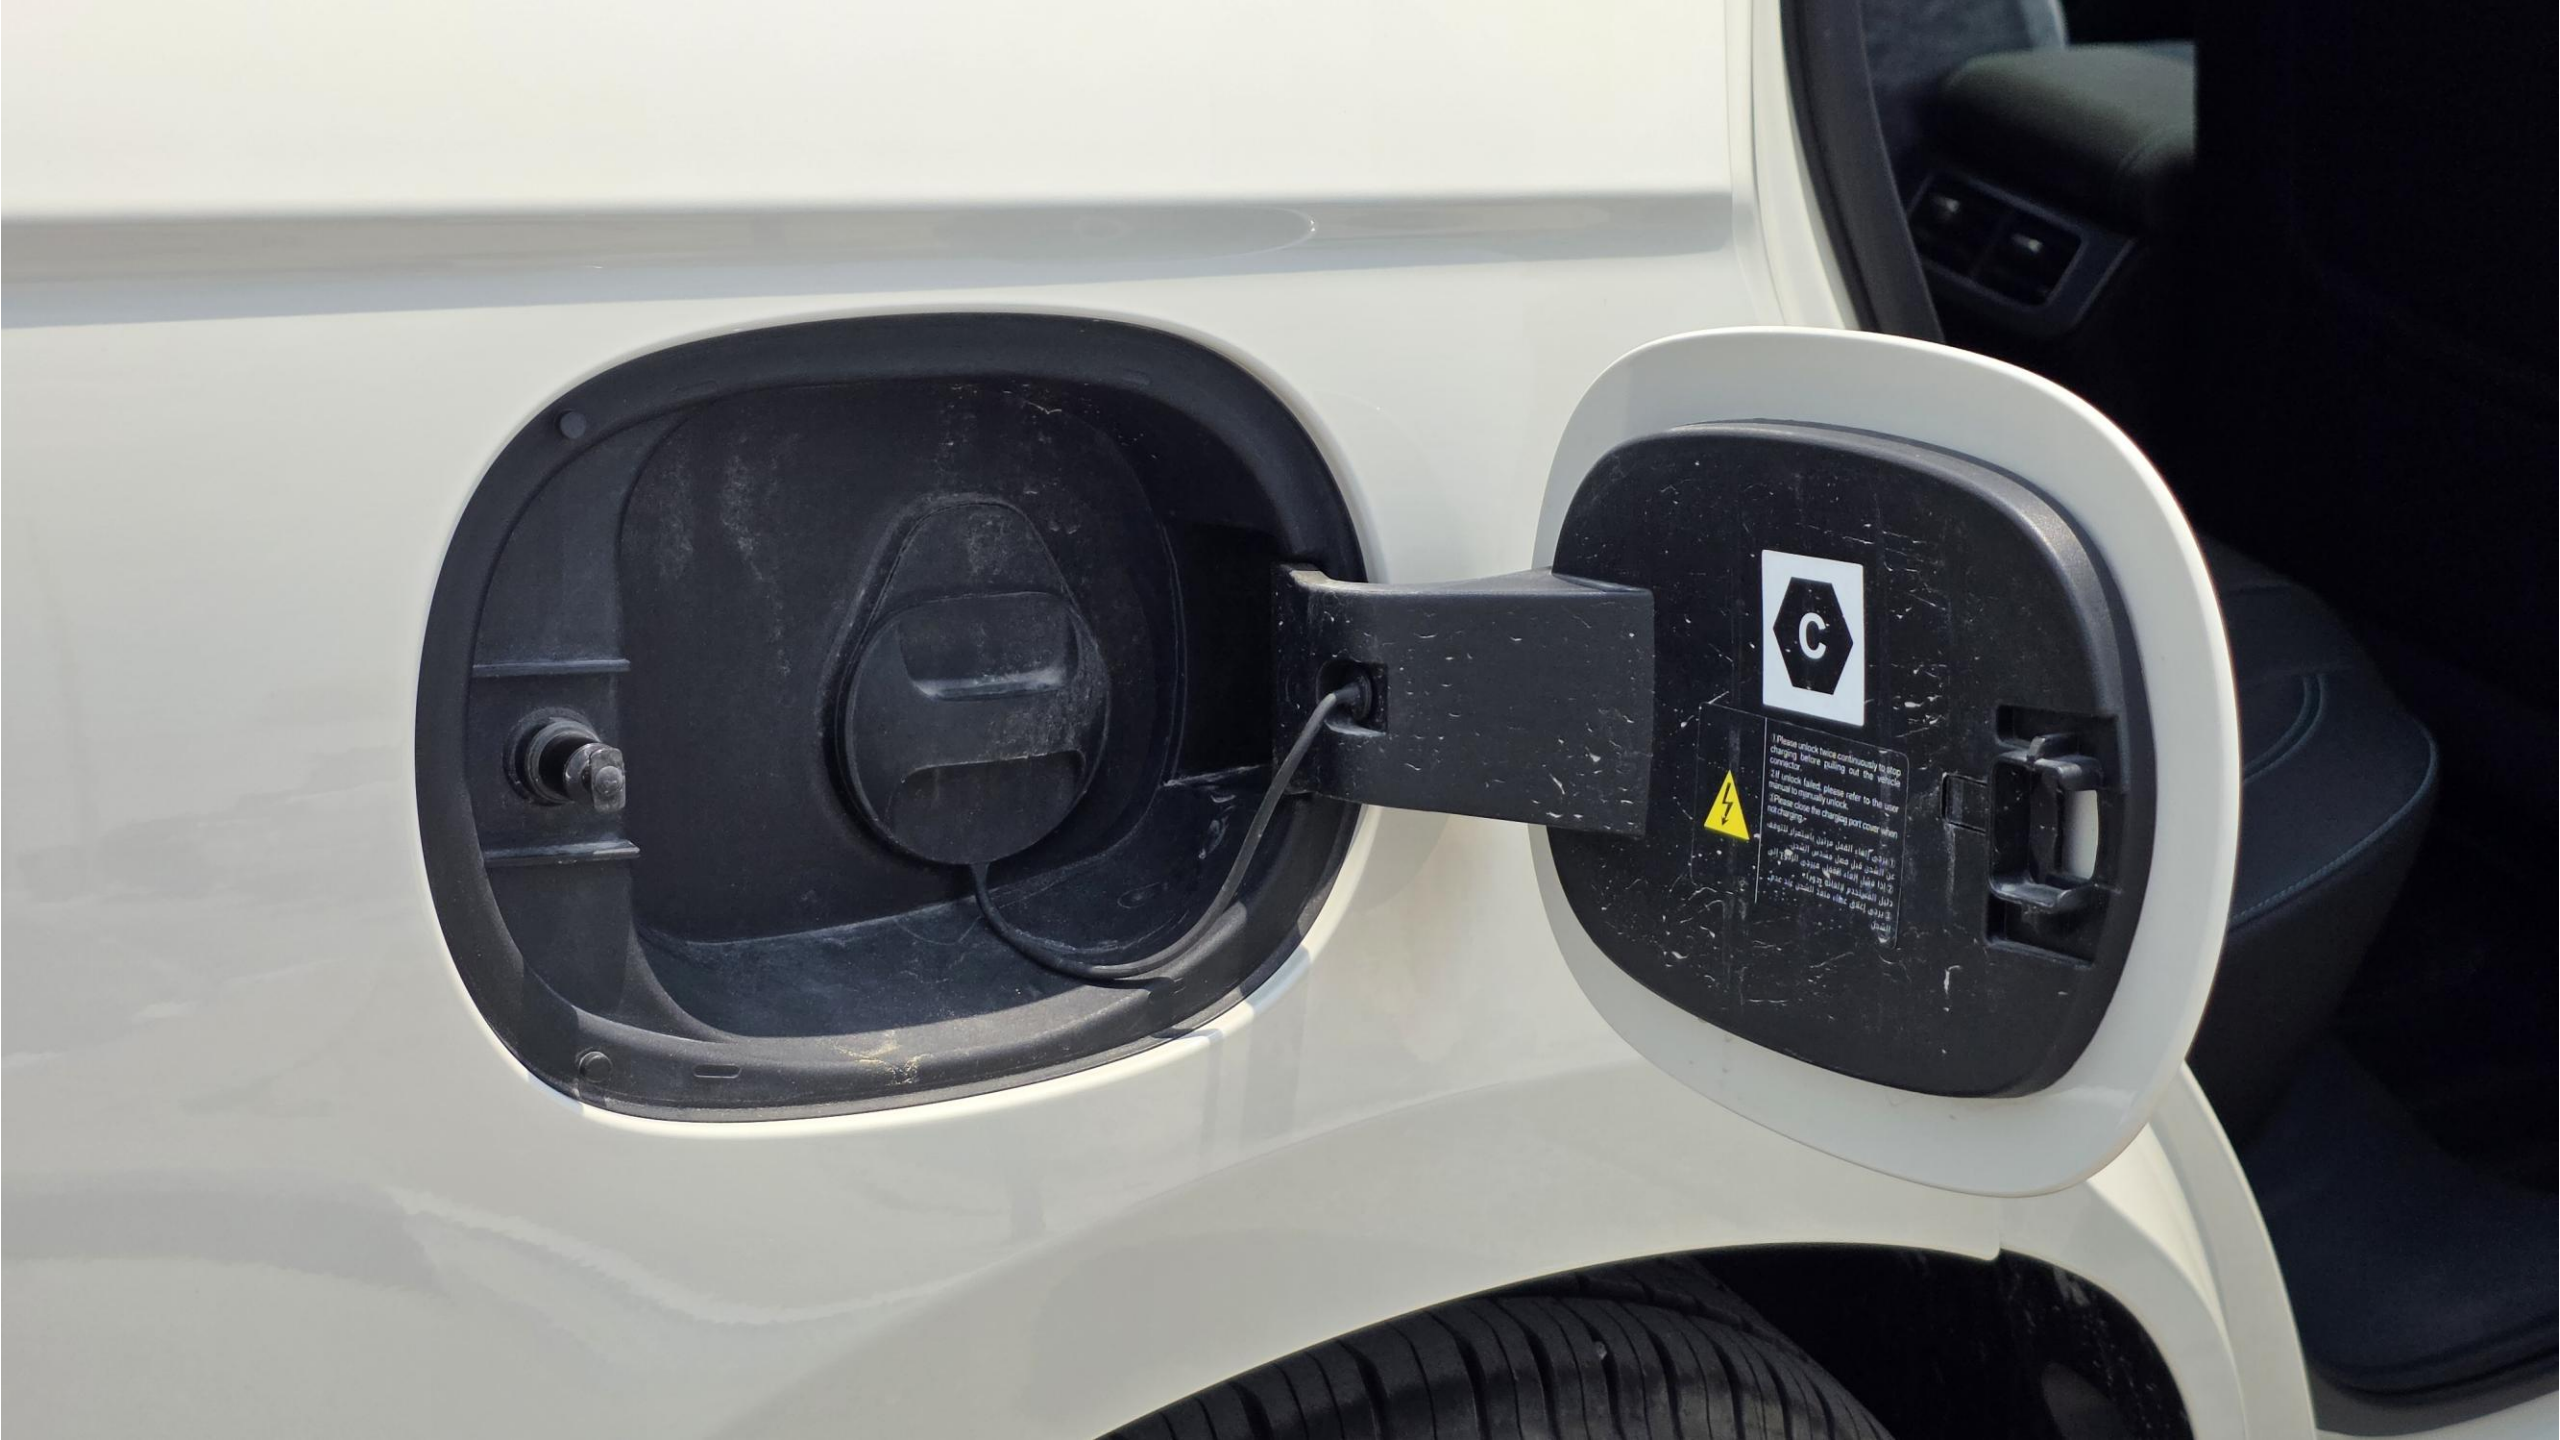

1 Please unlock twice continuously to stop charging before pulling out the vehicle connector.
2 If unlock failed, please refer to the user manual to manually unlock.
3 Please close the charging port cover when not charging.

1 يرجى فتح مرتين متتاليتين لإيقاف الشحن قبل سحب موصل المركبة.
2 إذا فشل في الفك، يرجى الرجوع إلى دليل المستخدم لفك القفل يدوياً.
3 يرجى إغلاق غطاء منفذ الشحن عند عدم الشحن.







BYD

DMH

SEAL 6

ALWAN

